




RP

Pneumatic On-Off Switches

Common Features	
Rated temperature	90 °C - 195 °F
Compressed air fitting	1/4 Bsp F
Required air pressure	7 bar - 101 psi

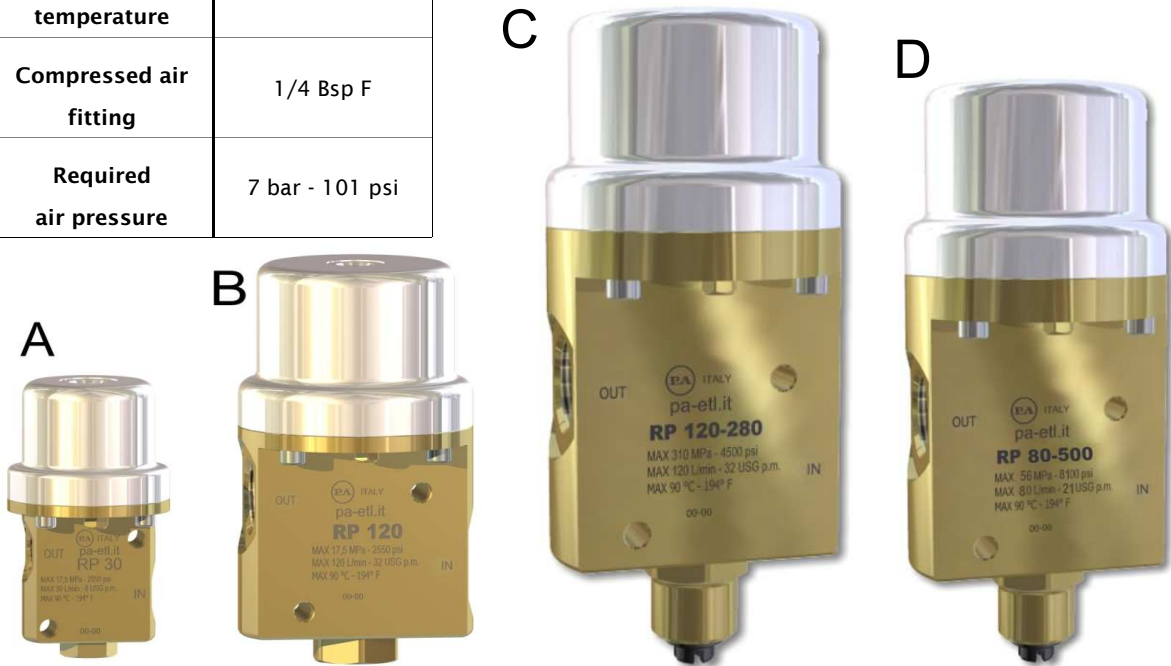

Part No	Type	Rated		Permissible		Rated		Inlet	Outlet
		bar	psi	bar	psi	Lpm	USGpm		
30.3280.00	A	160	2300	175	2550	30	8	1/4 Bsp F	1/4 Bsp F
30.3200.00	B	160	2300	175	2550	120	32	3/4 Bsp F	3/4 Bsp F
30.3230.00	C	280	4050	310	4500	120	32	3/4 Bsp F	3/4 Bsp F
30.3250.00	D	500	7250	550	8000	80	21	1/2 Bsp F	1/2 Bsp F

Technical features

- Pneumatic controlled ON-OFF tap that prevents the passage of fluid at lack of air pressure
- Stainless steel seat and ball
- Built completely in brass, sst and anodized aluminium
- Fixing screw slots