



QR code for X65 Range

X65 Range - Premium ISO 16028 Flat-Face Quick Couplings

DN5 (165), DN6.3 (265), DN10 (365), DN 12.5 (565),
DN16 (665), DN19 (765), DN25 (065)

- Minimize contamination of your hydraulic system
- Spill free disconnection
- High performance
- Connect under residual pressure, only limited by your strength

Temperature range: -30°C – +100°C (-22°F – +212°F)
 Material seal:..... Nitrile (NBR/PUR, other sealing materials on request)
 Material: Steel (zinc-nickel, zinc passivation)
 Connectability: Only limited by operator strength
 Disconnection under pressure: Not allowed
 Interchangeable with: All brands dimensionally interchanging with ISO16028




Dia (mm)*	Body Size			Series	Flow rate @ ΔP = 3 Bar		Max. working pressure				Min. burst pressure				Spillage @ Disconnect (ml)
	ISO - DN	Inch	Dash		(l/min)**	(GPM)**	Connected		Disconnected		Connected		Disconnected		
12.0	5	1/8"	-02	165	7.5	2.0	720	10442	720	10442	1800	26106	1800	26106	0.02
16.1	6.3	1/4"	-04	265	24	6.3	500	7251	500	7251	1500	21755	1500	21755	
19.7	10	3/8"	-06	365	44	11.6	400	5801	400	5801	1200	17404	1200	17404	
24.5	12.5	1/2"	-08	565	93	24.6	400	5801	400	5801	1200	17404	1200	17404	
27.0	16	5/8"	-10	665	139	36.7	400	5801	400	5801	1200	17404	1200	17404	
30.0	19	3/4"	-12	765	188	49.7	400	5801	400	5801	1200	17404	1200	17404	
36.0	25	1"	-16	065	330	87.2	350	5076	350	5076	1200	17404	1200	17404	

(**) If the application is constantly above this flow rate for the respective coupling size, a larger coupling size should be considered to avoid too high a pressure drop. The couplings can handle a much higher flow rate but there is a risk of heat build-up in the system. In general, surge flows above the normal flow rate are not a problem. (*) Diameter for easy identification of ISO16028 Flat-Face coupling size (see picture).

PRESSURE DROP CHART

Pressure drop ΔP (PSI)

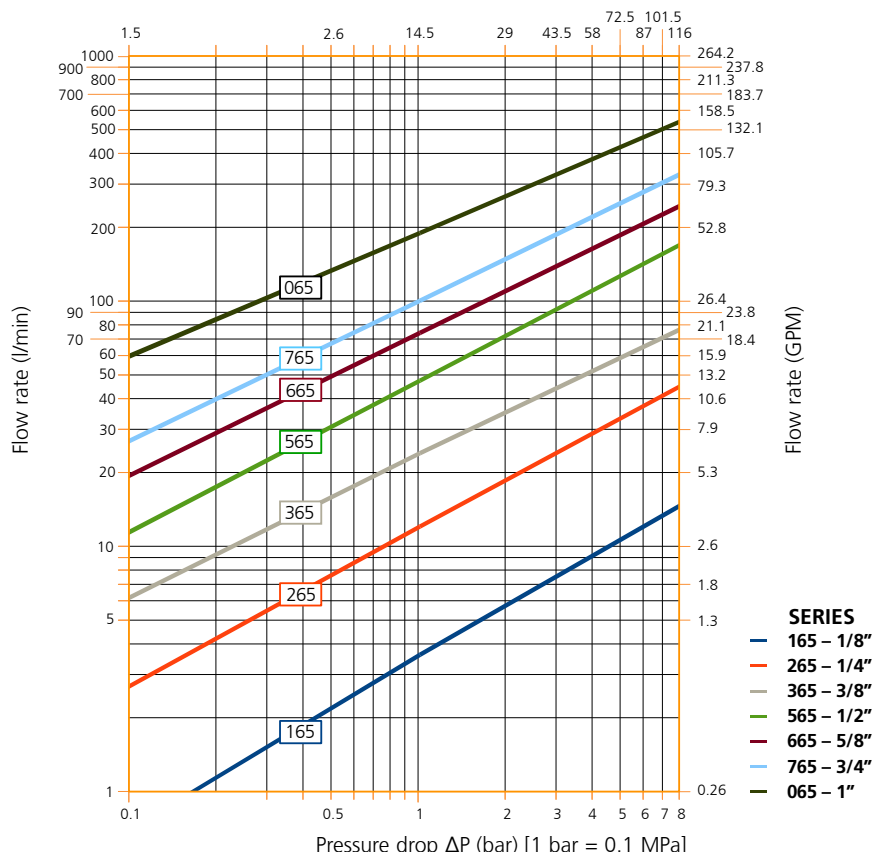

CEJN reserves the right to make changes without further notification. Check with an authorized CEJN distributor for availability and prices. All measurements are in mm. Thread connections are listed according to ISO Standards. Other connections on request. Please visit our website, www.cejn.com, for general maintenance tips.

COUPLINGS & NIPPLES

Body Size			Connection			Part No.		Weight (g)		Package Qty.
ISO - DN	Inch	Dash	Description	Type	Standards	Coupling/Female	Nipple/Male	Coupling	Nipple	
5	1/8"	-02	G 1/8" (BSP)	Female thread	DIN 3852	10 165 1201	10 165 6201	96	42	10
6.3	1/4"	-04	Rc 1/4" (BSPT)	Female thread	ISO 7/1	10 265 1102	10 265 6102	143	80	
			G 1/4" (BSP)	Female thread	DIN 3852	10 265 1202	10 265 6202	143	78	
			1/4" NPT	Female thread	ANSI B1.20.3	10 265 1402	10 265 6402	144	79	
			7/16"-20 UNF (1/4" SAE)	Female thread	SAE J 1926-1	10 265 1602	10 265 6602	148	83	
			M14x1.5 08L	Male thread	ISO 8434-1-L	10 265 1554	10 265 6554	147	81	
			M16x1.5 10L	Male thread	ISO 8434-1-L	10 265 1555	10 265 6555	149	83	
10	3/8"	-06	Rc 3/8" (BSPT)	Female thread	ISO 7/1	10 365 1104	10 365 6104	226	120	
			Rc 1/2" (BSPT)	Female thread	ISO 7/1	10 365 1105	10 365 6105	230	122	
			G 3/8" (BSP)	Female thread	DIN 3852	10 365 1204	10 365 6204	218	115	
			G 1/2" (BSP)	Female thread	DIN 3852	10 365 1205	10 365 6205	230	129	
			3/8" NPT	Female thread	ANSI B1.20.3	10 365 1404	10 365 6404	226	117	
			1/2" NPT	Female thread	ANSI B1.20.3	10 365 1405	10 365 6405	230	120	
			9/16"-18 UNF (3/8" SAE)	Female thread	SAE J 1926-1	10 365 1604	10 365 6604	250	139	
			3/4"-16 UNF (1/2" SAE)	Female thread	SAE J 1926-1	10 365 1605	10 365 6605	263	153	
			11/16"-16 ORFS bulkhead	Male thread	SAE J 1453	10 365 1757	10 365 6757	307	197	
			M16x1.5 10L	Male thread	ISO 8434-1-L	10 365 1552	10 365 6552	234	124	
			M18x1.5 12L	Male thread	ISO 8434-1-L	10 365 1554	10 365 6554	235	125	
			M22x1.5 15L	Male thread	ISO 8434-1-L	10 365 1555	10 365 6555	242	132	
			M18x1.5 12LS bulkhead	Male thread	ISO 8434-1-L	10 365 1557	10 365 6557	284	174	
			M22x1.5 15LS bulkhead	Male thread	ISO 8434-1-L	10 365 1558	10 365 6558	329	219	
12.5	1/2"	-08	G 3/8" JIS ORB	Female thread	JIS B2351	10 365 1294	10 365 6293	244	115	
			G 1/2" JIS ORB	Female thread	JIS B2351	10 365 1295	10 365 6296	253	144	
			Rc 1/2" (BSPT)	Female thread	ISO 7/1	10 565 1105	10 565 6105	396	272	
			G 1/2" (BSP)	Female thread	DIN 3852	10 565 1205	10 565 6205	386	250	
			G 3/4" (BSP)	Female thread	DIN 3852	10 565 1207	10 565 6207	375	238	
			1/2" NPT	Female thread	ANSI B1.20.3	10 565 1405	10 565 6405	396	264	
			3/4"-16 UNF (1/2" SAE)	Female thread	SAE J 1926-1	10 565 1605	10 565 6605	461	333	
			7/8" - 14 UNF (5/8" SAE)	Female thread	SAE J 1926-1	10 565 1606	10 565 6606	469	332	
			1 1/16"-12 UN (SAE 3/4")	Female thread	SAE J 1926-1	10 565 1607	10 565 6607	469	270	
			13/16"-16 ORFS bulkhead	Male thread	SAE J 1453	10 565 1756	10 565 6756	501	371	
			1"-14 ORFS bulkhead	Male thread	SAE J 1453	10 565 1758	10 565 6758	585	451	
			M18x1.5 12L	Male thread	ISO 8434-1-L	10 565 1554	10 565 6554	375	244	
			M22x1.5 15L	Male thread	ISO 8434-1-L	10 565 1555	10 565 6555	382	252	
			M18x1.5 12LS bulkhead	Male thread	ISO 8434-1-L	10 565 1557	10 565 6557	423	293	
M22x1.5 15LS bulkhead	Male thread	ISO 8434-1-L	10 565 1558	10 565 6558	461	332				
16	5/8"	-10	G 1/2" JIS ORB	Female thread	JIS B2351	10 565 1295	10 565 6296	410	275	
			Rc 3/4" (BSPT)	Female thread	ISO 7/1	10 665 1101	10 665 6101	468	314	
			G 3/4" (BSP)	Female thread	DIN 3852	10 665 1201	10 665 6201	465	303	
			3/4" NPT	Female thread	ANSI B1.20.3	10 665 1401	10 665 6401	476	312	
			1 1/16"-12 UN (3/4" SAE)	Female thread	SAE J 1926-1	10 665 1601	10 665 6601	500	335	
			M26x1.5 18L	Male thread	ISO 8434-1-L	10 665 1551	10 665 6551	472	312	
			1"-14 ORFS bulkhead	Male thread	SAE J 1453	10 665 1752	10 665 6752	624	464	

CEJN reserves the right to make changes without further notification. Check with an authorized CEJN distributor for availability and prices. All measurements are in mm. Thread connections are listed according to ISO Standards. Other connections on request. Please visit our website, www.cejn.com, for general maintenance tips.



COUPLINGS & NIPPLES

Body Size			Connection			Part No.		Weight (g)		Package Qty.
ISO - DN	Inch	Dash	Description	Type	Standards	Coupling/Female	Nipple/Male	Coupling	Nipple	
19	3/4"	-12	Rc 1" (BSPT)	Female thread	ISO 7/1	10 765 1103	10 765 6103	751	488	5
			G 3/4" (BSP)	Female thread	DIN 3852	10 765 1201	10 765 6201	766	502	
			G 1" (BSP)	Female thread	DIN 3852	10 765 1203	10 765 6203	714	479	
			3/4" NPT	Female thread	ANSI B1.20.3	10 765 1401	10 765 6401	792	523	
			1" NPT	Female thread	ANSI B1.20.3	10 765 1403	10 765 6403	743	487	
			1 5/16"-12 UN (1" SAE)	Female thread	SAE J 1926-1	10 765 1603	10 765 6603	818	547	
			M26x1.5 18L	Male thread	ISO 8434-1-L	10 765 1551	10 765 6551	718	449	
			M30x2 22L	Male thread	ISO 8434-1-L	10 765 1552	10 765 6552	725	456	
			M26x1.5 18LS bulkhead	Male thread	ISO 8434-1-L	10 765 1555	10 765 6555	837	568	
			M30x2 22LS bulkhead	Male thread	ISO 8434-1-L	10 765 1556	10 765 6556	872	603	
			G 3/4" JIS ORB	Female thread	JIS B2351	10 765 1291	10 765 6291	791	519	
			G 1" JIS ORB	Female thread	JIS B2351	10 765 1292	10 765 6292	754	485	
			Rc 1" (BSPT)	Female thread	ISO 7/1	10 065 1103	10 065 6103	1200	555	
			Rc 1 1/4" (BSPT)	Female thread	ISO 7/1	10 065 1104	10 065 6104	1347	783	
G 1" (BSP)	Female thread	DIN 3852	10 065 1203	10 065 6203	1195	565				
G 1 1/4" (BSP)	Female thread	DIN 3852	10 065 1204	10 065 6204	1297	780				
1" NPT	Female thread	ANSI B1.20.3	10 065 1403	10 065 6403	1200	555				
1 1/4" NPT	Female thread	ANSI B1.20.3	10 065 1404	10 065 6404	1293	747				
1 5/16"-12 UN (1" SAE)	Female thread	SAE J 1926-1	10 065 1603	10 065 6603	1400	560				
G 1" JIS ORB	Female thread	JIS B2351	10 065 1280	10 065 6280	1400	570				
G 1 1/4" JIS ORB	Female thread	JIS B2351	10 065 1281	10 065 6281	1500	760				

COUPLING FOR PANEL MOUNTING - PUSH-PULL FUNCTION

Body Size			Connection			Part No.		Weight (g)		Package Qty.
ISO - DN	Inch	Dash	Description	Type	Standards	Coupling/Female	Nipple/Male	Coupling	Nipple	
6.3	1/4"	-04	G 1/4" (BSP)	Female thread	DIN 3852	10 265 1282	-	148		10
10	3/8"	-06	G 3/8" (BSP)	Female thread	DIN 3852	10 365 1284	-	232		
12.5	1/2"	-08	G 1/2" (BSP)	Female thread	DIN 3852	10 565 1285	-	400		
16	5/8"	-10	G 3/4" (BSP)	Female thread	DIN 3852	10 665 1281	-	476		
19	3/4"	-12	G 3/4" (BSP)	Female thread	DIN 3852	10 765 1281	-	784		5

COUPLINGS/NIPPLES - SPECIAL HIGH PRESSURE VERSION OF 265

Body Size			Connection			Part No.		Max. working pressure Connected/Disconnected		Min. burst pressure Connected/Disconnected		Package Qty.
ISO - DN	Inch	Dash	Description	Type	Standards	Coupling/Female	Nipple/Male	(bar)	(PSI)	(bar)	(PSI)	
6.3	1/4"	-04	3/8" NPT	Female thread	ANSI B1.20.3	10 265 1434	-	720	10442	1800	26106	10
				Male thread		-	10 265 6484					

This special version is impulse tested at 1.33 x Max. WP for 10,000 pressure cycles.

CEJN reserves the right to make changes without further notification. Check with an authorized CEJN distributor for availability and prices. All measurements are in mm. Thread connections are listed according to ISO Standards. Other connections on request. Please visit our website, www.cejn.com, for general maintenance tips.

