

# **WA** ALUMINIUM HAND PUMPS









- Maximum working pressure 700 bar.
- For use with single-acting cylinders.
- Lightweight aluminium pumps.
- Two speed models.
- Hydraulic outlet port: 3/8"-NPT female.
- Fitted with external safety valves.

### **Performance under Pressure**



#### HYDRAULIC ALUMINIUM HAND PUMPS





- WA series pumps are for use with single-acting cylinders.
- Lightweight aluminium pumps, ideal for easy portability and handling.
- Two speed models to provide rapid cylinder advance until contact is made with the load.
- Hydraulic outlet port: 3/8"-NPT female.
- Fitted with external safety valves to prevent overpressure.
- Fitted with handle clip for ease of carrying.



Aluminium Hand Pump 2800 bar, WA21028.



Pressure Gauges.





Couplers.

### **Performance under Pressure**



Hydraulic Steel Hand Pumps W-Series and X-Series.



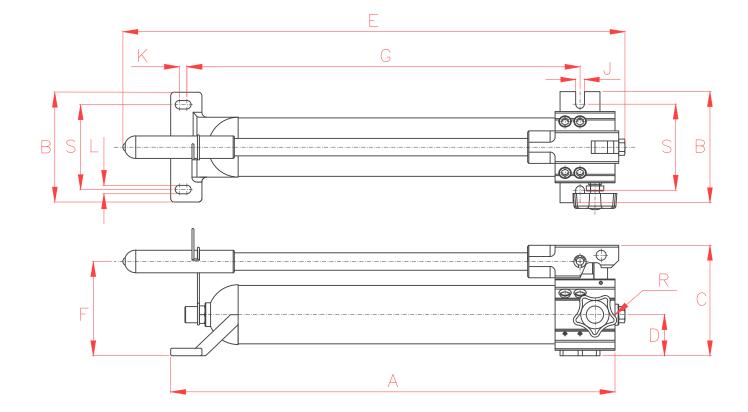

Model	Α	В	С	D	Е	F	G	н	J	к	L	R
LARZEP	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	н
WA20507	361	140	141	51	435	124	295,0	108	11,2	10	11,2	3/8"-NPT
WA21207	556	140	141	51	625	124	489,5	108	11,2	10	11,2	3/8"-NPT

Model	Usable oil	Handel effort	Oil displacement	t per stroke (cm³)	Pressure r	Weight	
LARZEP	cm <sup>3</sup>	kg	1 <sup>st</sup> Stage	2 <sup>nd</sup> Stage	1 <sup>st</sup> Stage	2 <sup>nd</sup> Stage	kg
WA20507	500	29	13,4	2,6	20	700	3,7
WA21107	1.100	43	15,0	3,1	20	700	5,0



34-006 EN 09-2016 © Larzep - Subject to change without notice.

## **Performance under Pressure**