



RLR425E10B

printed on: 21-04-2024

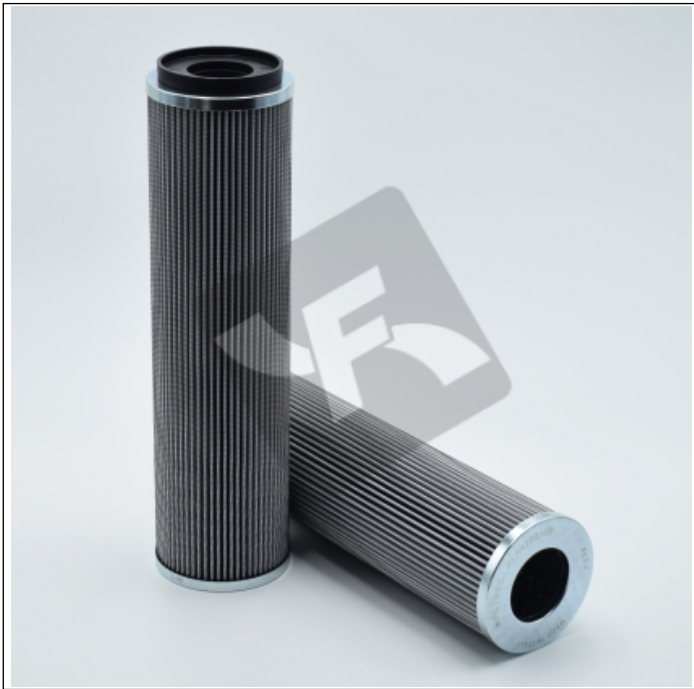

TECHNICAL INFO

Media type	INORGANIC FIBERGLASS
Efficiency	10 $\mu\text{m}_{(c)}$ $\beta_x \geq 200$
Efficiency 1	12 $\mu\text{m}_{(c)}$ $\beta_x \geq 1000$
Flow direction	OUT-IN
Collapse Δp	16 bar
Bypass setting	2.0 bar
Seals	NBR
Temperature range	-30°C +100°C
Note	PROVIDED WITH SPARE OR GASKET

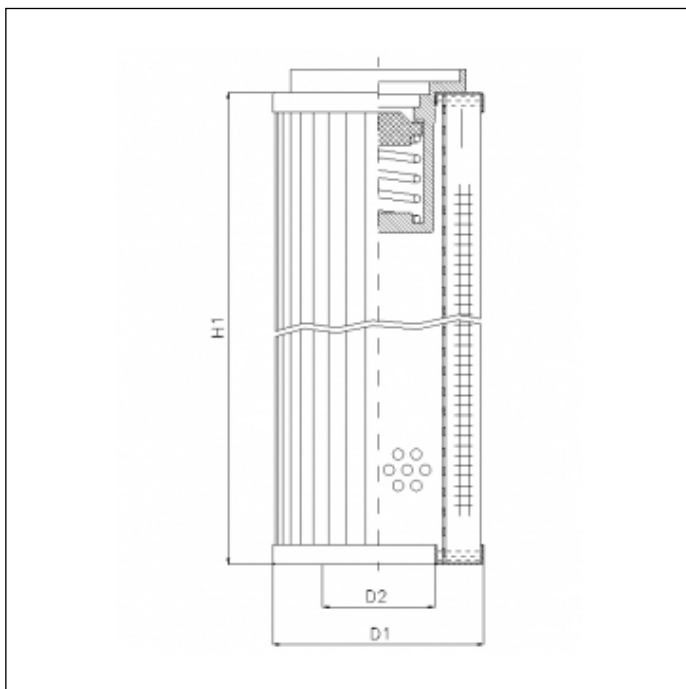

OVERALL DIMENSIONS

D1	83,0 mm
D2	45,0 mm
H1	304,0 mm

Technical information may change without notice. Image and drawing are representative only