

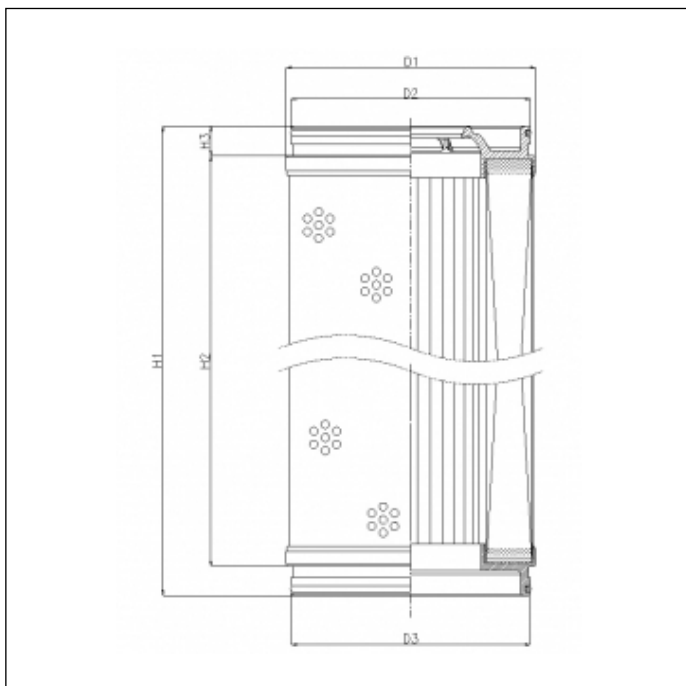

**U164G01V/ESD**

printed on: 29-07-2023



### TECHNICAL INFO

Media type	INORGANIC FIBERGLASS
Efficiency	<math>4 \mu\text{m}_{(c)} \beta_x \geq 200</math>
Efficiency 1	<math>4 \mu\text{m}_{(c)} \beta_x \geq 1000</math>
Flow direction	IN-OUT
Burst $\Delta p$	10 bar
Seals	FKM
Temperature range	-25°C +120°C
Note	ANTI-ESD FILTER ELEMENT



### OVERALL DIMENSIONS

D1	152,5 mm
D2	146,0 mm
D3	146,0 mm
H1	1.055,0 mm
H2	1.019,0 mm
H3	18,0 mm