Pocket control unit turned on
Lit 2 times in a second when HCU doesn't communicate with Receiver

Battery low or Error

L1 - green
L2 - yellow
L3 - yellow
L4 - yellow
L5 - red

Pocket Control Unit
type: 49110

3 x AAA size battery

SCANRECO
Radio Remote Control

RECEIVER
Type 5000

n° 2 cable glands M20

PUSH-BUTTONS ASSIGNMENT

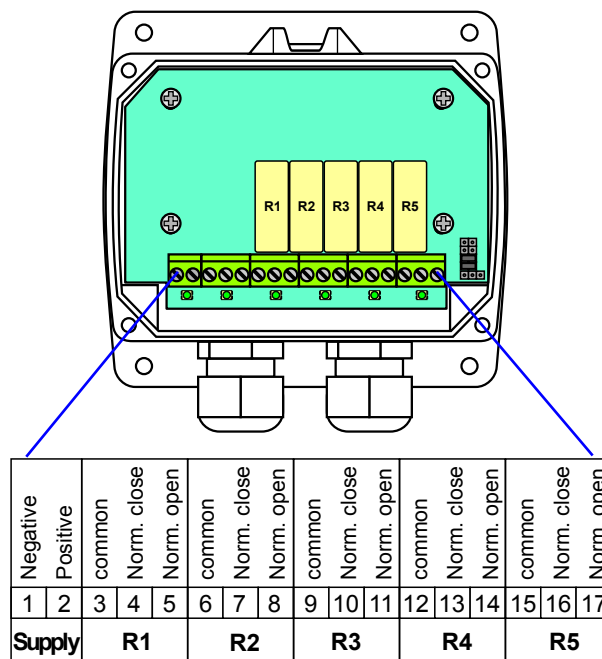| Button	Command
1	R1 + R5
2	R2 + R5
3	R3 + R5
4	R4 + R5
5	–
6	–
7	–
8	–

The Pocket control unit is powered automatically when a button is pushed

The Pocket turns off:
- automatically after 10 s is not used.
- automatically after 30s when it does't communicate with the Receiver

Each push-button commands relay R5 together with relays from R1 to R4.

The R5 relay turns off with a 0.5 s delay.

INTERNAL CONNECTIONS:

Negative	Positive	common	Norm. close	Norm. open	common	Norm. close	Norm. open	common	Norm. close	Norm. open	common	Norm. close	Norm. open	common	Norm. close	Norm. open
1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17
Supply		**R1**			**R2**			**R3**			**R4**			**R5**		

Supply voltage: 10 -28V

Max current specifications:
- each relay 10A