

- Compact size
- Interference-free
- Compatible with all diagnostic sensors and diagnostic measuring instruments
- Push-Pull plug
- Various lengths available
- Oil-resistant material

Cable for CAN bus sensors

Parker CAN bus cables are used to connect Parker CAN bus sensors to the **The Parker Service Master Plus** SCM-500.

The quick-plug screw connection SPEEDCON* makes connecting simple and secure.


CAN connection cable

SCK-401-02-4F-4M



CAN Y-junction

SCK-401-0.3-Y

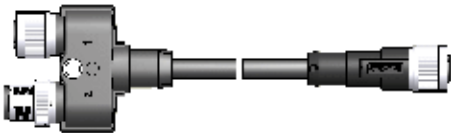

CAN terminating resistor

SCK-401-R



Cable for analog sensors

The **SensoControl**® diagnostics cable was designed for use in harsh working conditions.

5-pole version

The 5-pole cables with push-pull plugs fit to all 5-pole connections.

4-pole version

Diagnostic cables with 4-pole plugs are only compatible with the Serviceman types SCM-150-1-01/02 and SCM-152-2-08.

Connection cable (5-pin)

SCK-102-xx-02



Extension cable (5-pin)

SCK-102-05-12



Adapter

SCK-002-08

(for connecting a 4-pin sensor to a newer device)



Connection cable (4-pin)

SCK-102-02-08



* SPEEDCON® is a registered trademark of der Firma PHOENIX CONTACT GmbH & Co. KG

Housing	
Material	Cu alloy
Surface	chrom plated
Protection class (while plugged-in)	IP50

Cable	
Sheathing	PUR
Colour	black
Permissible temperatures	for stationary operations for non-stationary operations
	-20 ... +70 °C -5 ... +70 °C
Shielding	Cu meshed shield

SCK Connection Cables	#
Serviceman/The Parker Service Master <i>Family</i>	
3 m (male 5 pin - male 5 pin)	SCK-102-03-02
5 m (male 5 pin - male 5 pin)	SCK-102-05-02
5 m Extension cable (male 5 pin - female 5 pin)	SCK-102-05-12
Adapter (female 4 pin - male 5 pin)	SCK-002-08
2 m (4 pin) is only for the older versions of the Serviceman (SCM-150-1-01/02 and SCM-152-2-08)	SCK-102-02-08

SCK Connection Cables CAN*	#
The Parker Service Master <i>Plus</i>	
2 m (male 5 pin - female 5 pin)	SCK-401-02-4F-4M
5 m (male 5 pin - female 5 pin)	SCK-401-05-4F-4M
10 m (male 5 pin - female 5 pin)	SCK-401-10-4F-4M
CAN Y-splitter incl. 0,3 m cable	SCK-401-0.3-Y
CAN terminating resistor** (female 5 pin - female 5 pin)	SCK-401-R

* Other lengths available on request.

** Each CAN network requires a terminating resistor.