

MANUAL GREASE PUMPS

P/N OE60280

Portable high-pressure 350 - 400 bar, hand-operated grease pump for drums of 12 - 20 kg with external \varnothing from 240 mm to 260 mm, equipped with: ▶ manual pump ▶ drum cover \varnothing 280 mm ▶ grease follower plate \varnothing 265 mm ▶ 1/4" - 2,5 m hose ▶ rigid terminal with 4-jaw grease head P/N OE66739

No.1 packing m³ 0,022 kg 5,4

OVERALL DIMENSIONS P:350 H:630 L:280 mm

P/N OE60310

Portable high-pressure 350 - 400 bar, hand-operated grease pump for drums of 16 - 30 kg with external \varnothing from 255 mm to 300 mm, equipped with: ▶ manual pump ▶ drum cover \varnothing 310 mm ▶ grease follower plate \varnothing 310 mm ▶ tubo 1/4" - 2,5 m ▶ rigid terminal with 4-jaw grease head P/N OE66739

No.1 packing m³ 0,022 kg 6,5

OVERALL DIMENSIONS P:350 H:630 L:310 mm

P/N OE60311

Portable high-pressure 350 - 400 bar, hand-operated grease pump for drums of 16 - 30 kg with external \varnothing from 270 mm to 330 mm, equipped with: ▶ manual pump ▶ drum cover \varnothing 337 mm ▶ grease follower plate \varnothing 310 mm ▶ 1/4" - 2,5 m hose ▶ rigid terminal with 4-jaw grease head P/N OE66739

No.1 packing m³ 0,036 kg 7,2

OVERALL DIMENSIONS P:350 H:630 L:337 mm



HAND-OPERATED GREASE TRANSFER PUMPS

P/N OE60410

Portable hand-operated grease transfer pump for drums of 16 - 30 kg with external \varnothing from 255 mm to 300 mm, equipped with: ▶ hand-operated transfer pump ▶ drum cover \varnothing 310 mm ▶ grease follower plate \varnothing 310 mm ▶ 1/2" - 2 m hose ▶ dispenser with rigid terminal

No.1 packing m³ 0,030 kg 6

OVERALL DIMENSIONS P:350 H:780 L:310 mm

P/N OE60411


Portable hand-operated grease transfer pump for drums of 16 - 30 kg, with external \varnothing from 270 mm to 330 mm, equipped with: ▶ hand-operated transfer pump ▶ drum cover \varnothing 337 mm ▶ grease follower plate \varnothing 310 mm ▶ 1/2" - 2 m hose ▶ dispenser with rigid terminal

No.1 packing m³ 0,040 kg 6,7


OVERALL DIMENSIONS P:350 H:780 L:337 mm



Filling central greasing system

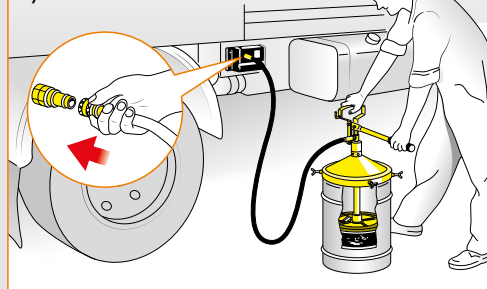

Transfer in small drums

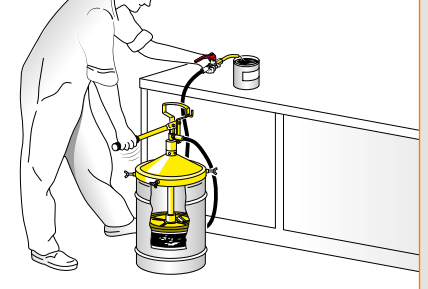

P/N OE60450

Female quick connector, complete with check valve, 1/4" F thread for filling central greasing system. Max pressure 350 bar

P/N OE60451

Male quick connector, complete with check valve, 1/4" F thread for filling central greasing system. Max pressure 350 bar

Quick connect coupling

